
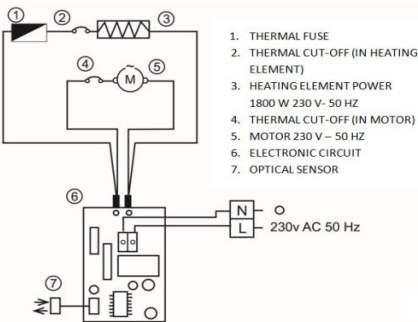




# TECHNICAL DATA SHEET

NAME	REFERENCE	
OPTICAL SENSOR OPERATED VITRIFIED HAND DRYER	AA94000	
DESCRIPTION		
<p>HIGH QUALITY AND PERFORMANCE TRADITIONAL HAND DRYER</p> <p>DOUBLE ELECTRICAL INSULATION</p> <p>OPTICAL SENSOR OPERATED: ACTIVATES BY APPROACHING HANDS AND STOPS AUTOMATICALLY</p> <p>CLASS II: NO GROUNDING WIRE REQUIRED, AT 0,6 mts FROM WATER POINT</p> <p>HIGH QUALITY VITRIFIED STEEL</p>		
ELECTRICAL STEEL		
 <ol style="list-style-type: none"> <li>1. THERMAL FUSE</li> <li>2. THERMAL CUT-OFF (IN HEATING ELEMENT)</li> <li>3. HEATING ELEMENT POWER 1800 W 230 V- 50 HZ</li> <li>4. THERMAL CUT-OFF (IN MOTOR)</li> <li>5. MOTOR 230 V – 50 HZ</li> <li>6. ELECTRONIC CIRCUIT</li> <li>7. OPTICAL SENSOR</li> </ol>	<th>EAN CODE</th>	EAN CODE
	8427950323164	

CHARACTERISTICS				
NET (without packaging)	DIMENSIONS (mm)	HEIGHT: 220	WIDTH: 280	DEPTH: 210
	WEIGHT (Kg)	4,385		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 285	WIDTH: 345	DEPTH: 295
	WEIGHT (Kg)	5,085		
MATERIALS	STAMPED VITRIFIED STEEL COVER INTERNAL COMPONENTS IN POLYCARBONATE "V0" NOZZLE MADE OF NATURAL CHROME ABS			
COLOUR / FINISH	WHITE STAMPED VITRIFIED STEEL COVER CHROME NOZZLE			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC		AIRSPEED: 121 Km/HORA	
	FREQUENCY: 50 Hz.		EFFICIENT AIRFLOW: 300 m <sup>3</sup> /HORA	
ELECTRICAL FEATURES	CONSUMPTION: 8,8 Amp.		SOUND PRESSURE: 77,5 Db.	
	MOTOR POWER: 200 W.		AIR TEMPERATURE: 54,1 °C (At a distance of 10 cm.)	
ELECTRICAL FEATURES	HEATING ELEMENT POWER: 1800 W.		ELECTRICAL INSULATION: CLASS II	
	TOTAL POWER: 2000 W.		CERTIFICATIONS: TÜV, GS, UL AND CE	
ELECTRICAL FEATURES	MOTOR RPM: 4250		PROTECTION RATIO: IP23	
	TYPE OF MOTOR : BRUSHED			
FIXING	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - PROVIDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by : Quality Control Dept	
			DATE: 12/05/2015	