
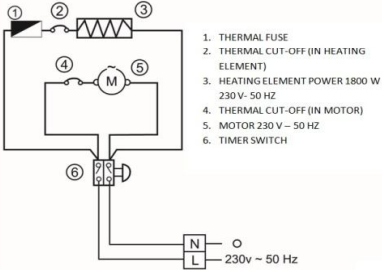




TECHNICAL DATA SHEET

NAME	REFERENCE
PUSH BUTTON OPERATED HAND DRYER FUTURA	AA13000
DETAILS	
HIGH QUALITY AND HIGH PERFORMANCE STANDARD HAND DRYER DOUBLE ELECTRICAL INSULATION MANUAL PUSH BUTTON AND AUTOMATIC STOP CLASS II: GROUND WIRE NOT REQUIRED. DISTANCE FROM WATER POINT 0,6 mts WHITE ABS FINISH, HIGH QUALITY AND RESISTANCE	
ELECTRICAL SCHEME	
 <p> 1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. TIMER SWITCH </p>	EAN CODE 8427950303425

CHARACTERISTICS				
NET (Without packaging)	DIMENSIONS(mm)	HEIGHT: 320	WIDTH: 230	DEPTH: 145
	WEIGHT (Kg)	2,855		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 380	WIDTH: 290	DEPTH: 225
	WEIGHT (Kg)	3,435		
MATERIALS	CASING AND PUSH BUTTON MADE OF ABS INTERNAL COMPONENTS MADE OF ABS AND POLYCARBONATE V0			
COLOUR / FINISH	WHITE COVER PUSH BUTTON AND AIR OUTLET GRILLE : GREY			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC FREQUENCY: 50 Hz. CONSUMPTION: 8,5 Amp. MOTOR POWER: 140 W. HEATING ELEMENT POWER: 1820 W. TOTAL POWER: 1960 W. MOTOR RPM: 2800		AIR SPEED: 68 Km/HOUR EFFECTIVE AIR FLOW: 250 m³/HOUR SOUND PRESSURE: 58 Db. AIR TEMPERATURE: 55°C (from 10 cm) ELECTRICAL INSULATION: CLASS II CERTIFICATES: CE, TÜV AND GS PROTECTION RATIO: IPX1	
	FIXING SYSTEM	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - PROVIDED		
PACKAGING	SINGLE UNIT PACKAGING		Approved by : Quality Control Dept	
			DATE : 12/05/2015	